



Thin Client Technology At Its Peak

Part Number: 5172v

5172v thin client

The **5172v** Thin Client is designed for a desktop virtualisation (VDI) environment. Complete with VMware View with PCoIP, Citrix XenDesktop, 2X VirtualDesktopServer, Quest vWorkspace, Leostream Connection Broker, Ericom PowerTermWebConnect and Kaviza VDI-In-A-Box, this unit offers a complete desktop experience.


The 5172v is the fastest, small form factor thin client on the market. Powered by a 1GHz processor and available with a wide assortment of legacy ports, this unit is both powerful and flexible. The 5172v also offers Fast Boot for half the normal boot up time.



The **5172v** supports three modes of operation:

WBT Mode	Windows based Terminal mode, where the terminal behaves like a CE.NET device with full screen applications, Terminal Server access, Citrix or VDI which auto start and auto-reconnect.	
Desktop Mode	Windows Vista type user interface provides access to all applications in a windowing environment.	
Kiosk Mode	Dedicated Kiosk type of interface not configurable by the user of the terminal.	

Reduce IT Costs,
Increase Security
and Improve
Efficiency by
switching to 10ZiG
Thin Clients

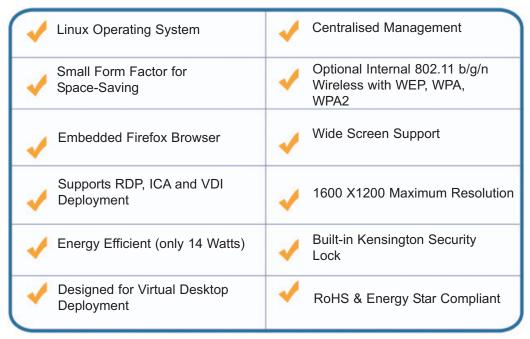







5172v thin client



System		
Operating System	Linux 2.6 Kernel	
Form Factor	Compact case	
Management	10ZiG Management Software	
Processor	VIA C7 1GHz/ VIA CN700+VT8237R Plus	
Browser	Firefox 3.0	
Wide Screen Support	•	
Video Resolution	Up to 1600 x 1200 x 32 bit color	
	<u> </u>	
Software Configu	ration	
VDI Clients:	Quest vWorkspace, Leostream, Citrix XenDesktop HDX, Ericom PowerTerm WebConnect, VMware View with PCoIP and 2X VirtualDesktopServer	
ICA	Version 11 with HDX	
RDesktop	1.6	
Client Software	Adobe Acrobat Reader	
	Adobe Flash Player 10	
	Sun JVM 1.6	
	VNC Shadowing	
	Cisco VPN	
	Thunderbird Email	
	Linux PN Agent	
	NX Client	
	X-Windows	
Memory		
RAM (Stand/MAX)	256MB/512MB	
Storage (Stand/MAX)	512MB/2GB	
Dimensions		
Device	1.7" W x 9.4" H x 8.9" D 43mm x 240mm x 225mm	
Weight	4.2 lbs. (1.9kg)	
Audio		
Mic In/Line Out	•	
Speaker	x 1 (built-in 1W internal Speaker)	
Management		
10ZiG Remote Manage	er •	
Various Client (
Shadow Termin		
Status Indicatio		
Power on, Log of and Shut down		
Task Scheduler	•	
Cloning of Terminals		
Group Operations •		
Configuration of Various Connection Types including 5250		
	cs including 3230	
Update of Firm	_	

Ports	
USB Ports Type 2	x4
PS2 Port	x2 (for keyboard &
102 1010	mouse)
Parallel Port	x1
Serial Port	x1
Video	x1 VGA
Environmental	
Operating Temperature	0° ~ 35°C
	32° ~ 95°F
Operating Humidity	20% ~ 80% non-condensing
Power	
Consumption	14 watts average
AC/DC Adapter	Included
Networking	
	Autosensing, 10/100 Ethernet, RJ-45, WakeOnLAN, PXE boot, 802.11 b/g/n wireless optional
Compliance	
	RoHS, CE, FCC, BSMI
Features	
Security Features	Kensington Security Lock Slot
	Auto start/auto-restart connection Lock-down user interface
Language Support	US, UK English, German, French, Swedish and others by request

Ordering Information		
PID	Description	
5172v	5172v, Linux, RDP, ICA, VDI Clients and Optical Mouse	
9001	USB to Centronics	
9010	Internal Wireless (b/g/n)	
8104b	104-Key PC Keyboard	



